




Specification Sheet

EroNet™ P300® Permanent Erosion Control Blanket

DESCRIPTION

The permanent erosion control blanket shall be a machine-produced mat of 100% UV stable polypropylene fiber. The matting shall be of consistent thickness with the synthetic fibers evenly distributed over the entire area of the mat. The matting shall be covered on the top side with black heavyweight UV-stabilized polypropylene netting having ultraviolet additives to delay breakdown and an approximate 0.50 x 0.50 inch (1.27 x 1.27 cm) mesh. The bottom net shall also be UV-stabilized polypropylene with a 0.63 x 0.63 inch (1.57 x 1.57 cm) mesh size. The blanket shall be sewn together on 1.5 inch (3.81 cm) centers with non-degradable thread. All mats shall be manufactured with a colored thread stitched along both outer edges as an overlap guide for adjacent mats. The P300 shall meet Type 5A, 5B, specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.18

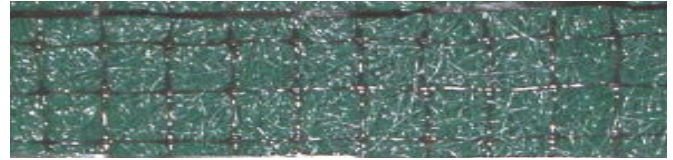

Material Content		
Matrix	100% UV stable Polypropylene Fiber	0.7 lbs/sq yd (0.38 kg/sm)
	Top: UV-stabilized Polypropylene	5 lbs/1000 sq ft (24.4 g/sm)
Netting	Bottom: UV-stabilized Polypropylene	3 lbs/1000 sq ft (14.7 g/sm)
	Thread	Polypropylene, UV stable

Standard Roll Sizes		
Width	6.67 ft (2.03 m)	8 ft (2.44 m)
Length	108 ft (32.92 m)	112 ft (35.14 m)
Weight ± 10%	61 lbs (27.66 kg)	76.25 lbs (34.59 kg)
Area	80 sq yd (66.0 sm)	100 sq yd (83.61 sm)

Slope Design Data: C Factors			
Slope Length (L)	Slope Gradients (S)		
	≤ 3:1	3:1 - 2:1	≥ 2:1
≤ 20 ft (6 m)	0.001	0.029	0.082
20-50 ft	0.036	0.060	0.086
≥ 50 ft (15.2 m)	0.070	0.090	0.110

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.47 in. (11.94 mm)
Resiliency	ASTM D6524	91.5%
Density	ASTM D792	0.916 g/cm ³
Mass/Unit Area	ASTM 6566	13.03 oz/sy (443 g/m ²)
UV Stability	ASTM D4355/1000 hr	90%
Porosity	ECTC Guidelines	95.89%
Stiffness	ASTM D1388	0.94 in-lb (1085378 mg-cm)
Light Penetration	ASTM D6567	17.9%
Tensile Strength - MD	ASTM D6818	438 lbs/ft (6.49 kN/m)
Elongation - MD	ASTM D6818	28.1%
Tensile Strength - TD	ASTM D6818	291.9 lbs/ft (4.32 kN/m)
Elongation - TD	ASTM D6818	26.7%
Biomass Improvement	ASTM D7322	497%

Design Permissible Shear Stress		
	Short Duration	Long Duration
Phase 1: Unvegetated	3.0 psf (144 Pa)	2.0 psf (96 Pa)
Phase 2: Partially Veg.	8.0 psf (383 Pa)	8.0 psf (383 Pa)
Phase 3: Fully Veg.	12.0 psf (576 Pa)	10.0 psf (480 Pa)
Unvegetated Velocity	9.0 fps (2.7 m/s)	
Vegetated Velocity	16 fps (4.9 m/s)	

Roughness Coefficients - Unveg.	
Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.034
0.50 - 2.0 ft	0.034-0.020
≥ 2.0 ft (0.60 m)	0.020



Western Green
4609 E. Boonville-New Harmony Rd.
Evansville, IN 47725

nagreen.com
800-772-2040

©2019, North American Green is a registered trademark from Western Green. Certain products and/or applications described or illustrated herein are protected under one or more U.S. patents. Other U.S. patents are pending, and certain foreign patents and patent applications may also exist. Trademark rights also apply as indicated herein. Final determination of the suitability of any information or material for the use contemplated, and its manner of use, is the sole responsibility of the user. Printed in the U.S.A.